



City of West Hollywood
California 1984

WEHO | DESIGN DISTRICT STREETSCAPE

Phase 1A – Utility Undergrounding
Phase 2 – Melrose Ave Streetscape



The Team

Lead Agency



Construction Manager



SCE Contractors



City Contractor



Designer



Funded in Part By



History



June 2011: City Council initiated the Avenues Streetscape Master Plan

August 2014: Renamed The West Hollywood Design District Streetscape Master Plan

December 2014: Amendment added public gathering spaces

March 2018: Established the Working Group

November 2018: First community-based Working Group meeting held


2019 & Beyond: 10+ community meetings





The Design District will be enhanced by the following upgrades:

- New street paving
- New wider, decorative sidewalks
- New LED energy efficient streetlights
- New In Roadway Lighting at crosswalks which alerts cars with street level blinking lights to slow down and stop
- Storm drain improvements
- Electric Vehicle charging stations
- Improved bus shelters
- New landscaping and tree replanting

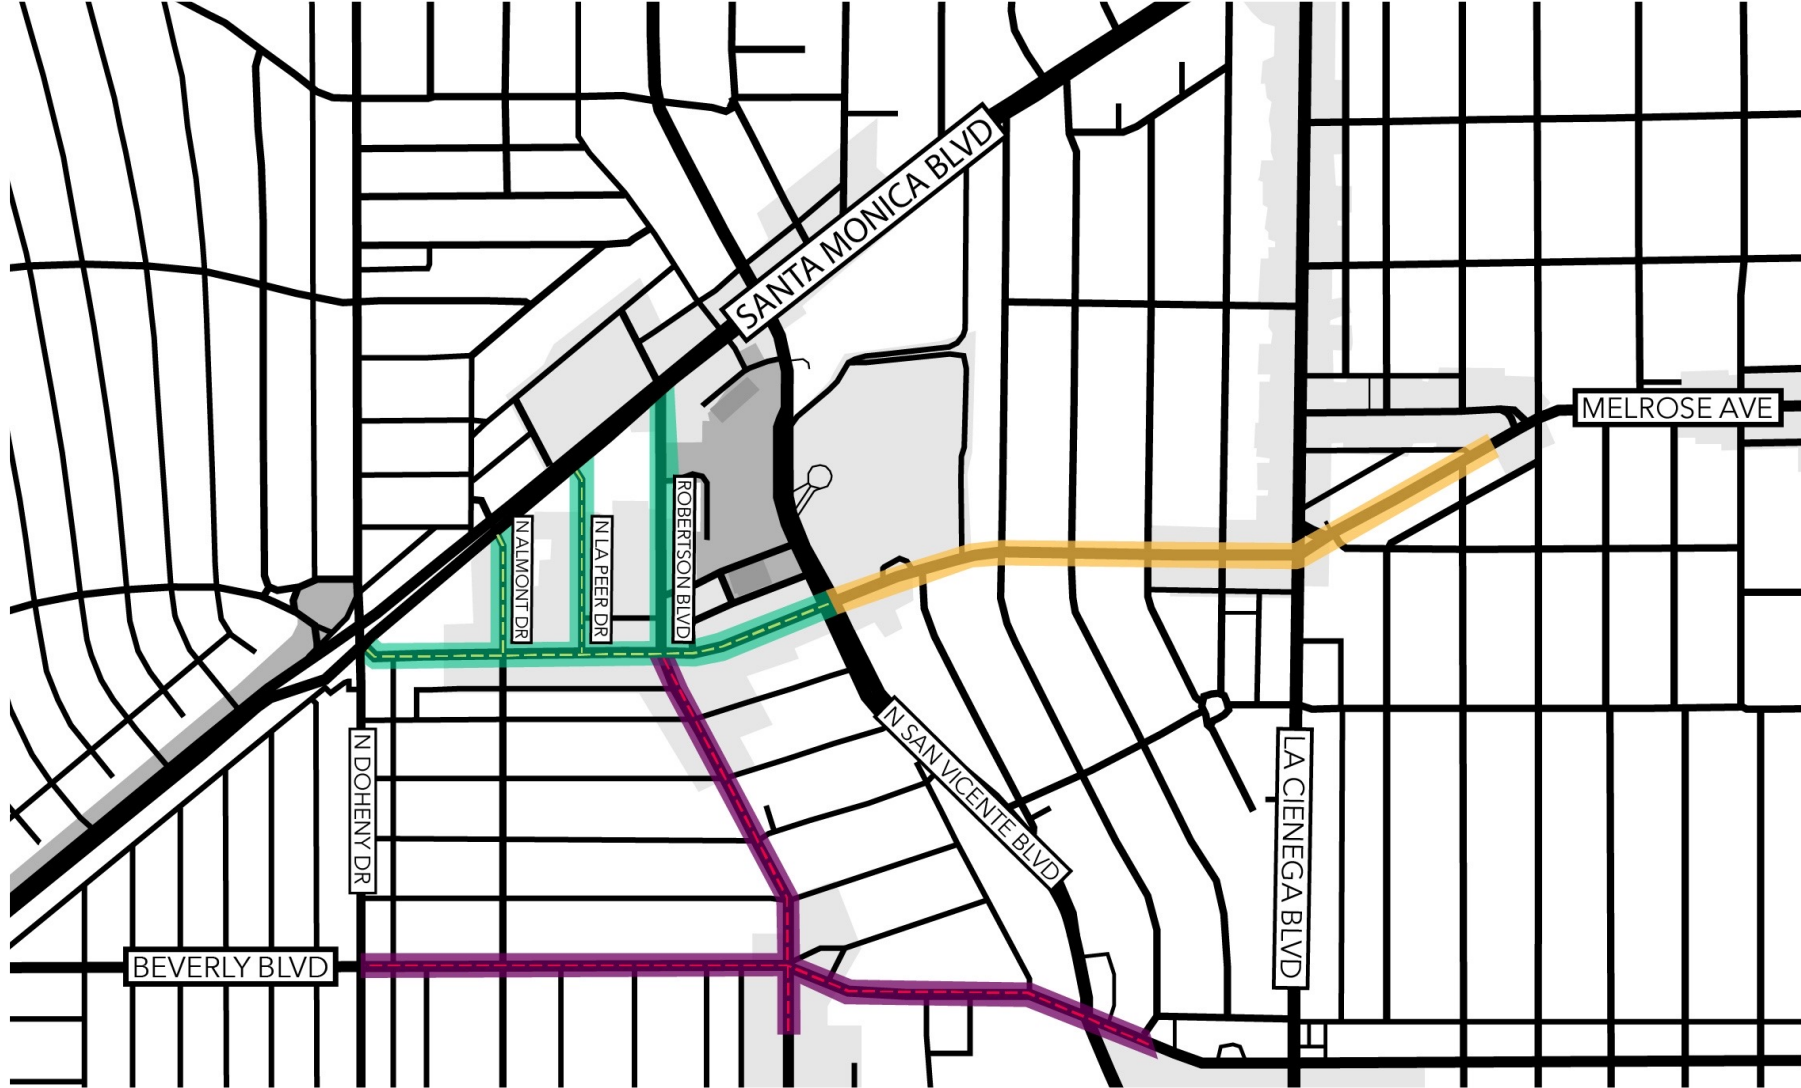

IMPROVEMENT PHASES

Streetscape Phases

- Phase 2
- Phase 3
- Phase 5

Underground Phases


- Phase 1A
Undergrounding
(Melrose)
- Phase 1B
Undergrounding
(Almont + La Peer)
- Phase 4
Undergrounding



Melrose Ave & N San Vicente Blvd

Phase 1A

*Utility Undergrounding on
Melrose Avenue*

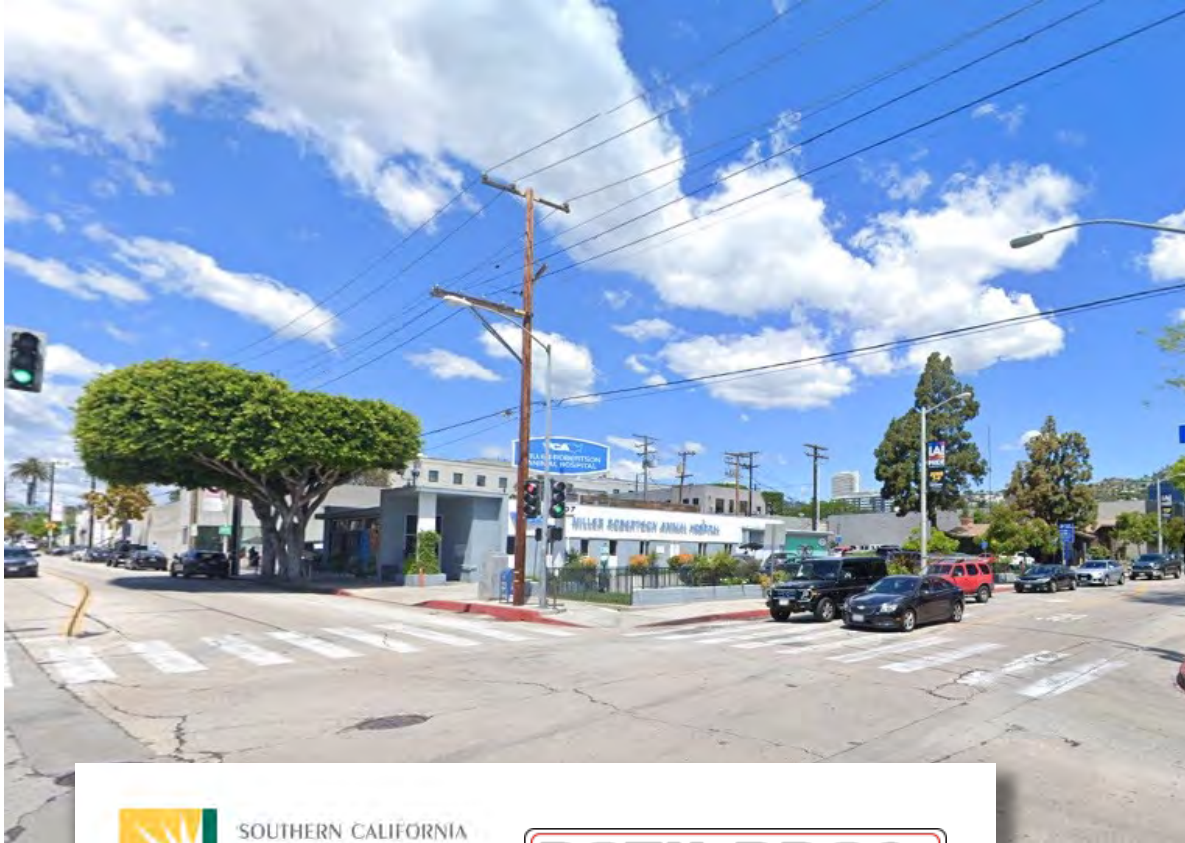

Utility Undergrounding

Southern California Edison (SCE) is leading the utility undergrounding phase in cooperation with the City of West Hollywood and Berg.


Undergrounding of Overhead Poles



Undergrounding Schedule

Construction Start: April 2022
Contract Duration: Approx. 8 months

ID	Task Name	Duration	Start	Finish	2022		
					Jun	Qtr 3, 2022 Jul	Aug
1	Fuller 16KV Rule 20						
2	Crew 1						
3	Pouring concrete at west end of Melrose Ave	1 day	Mon 7/18/22	Mon 7/18/22			
4	Finish AT&T crossing for new business	2 days	Tue 7/19/22	Wed 7/20/22			
5	Continue with concrete restoration. Starting on Melrose Ave, East of La Peer, and continuing west	12 days	Thu 7/21/22	Fri 8/5/22			
6	Grind and cap North and South Almont & La Peer	5 days	Mon 8/8/22	Fri 8/12/22			
7							
8	Crew 2						
9	Mandrel conduits with SCE & Spectrum	5 days	Mon 7/18/22	Fri 7/22/22			

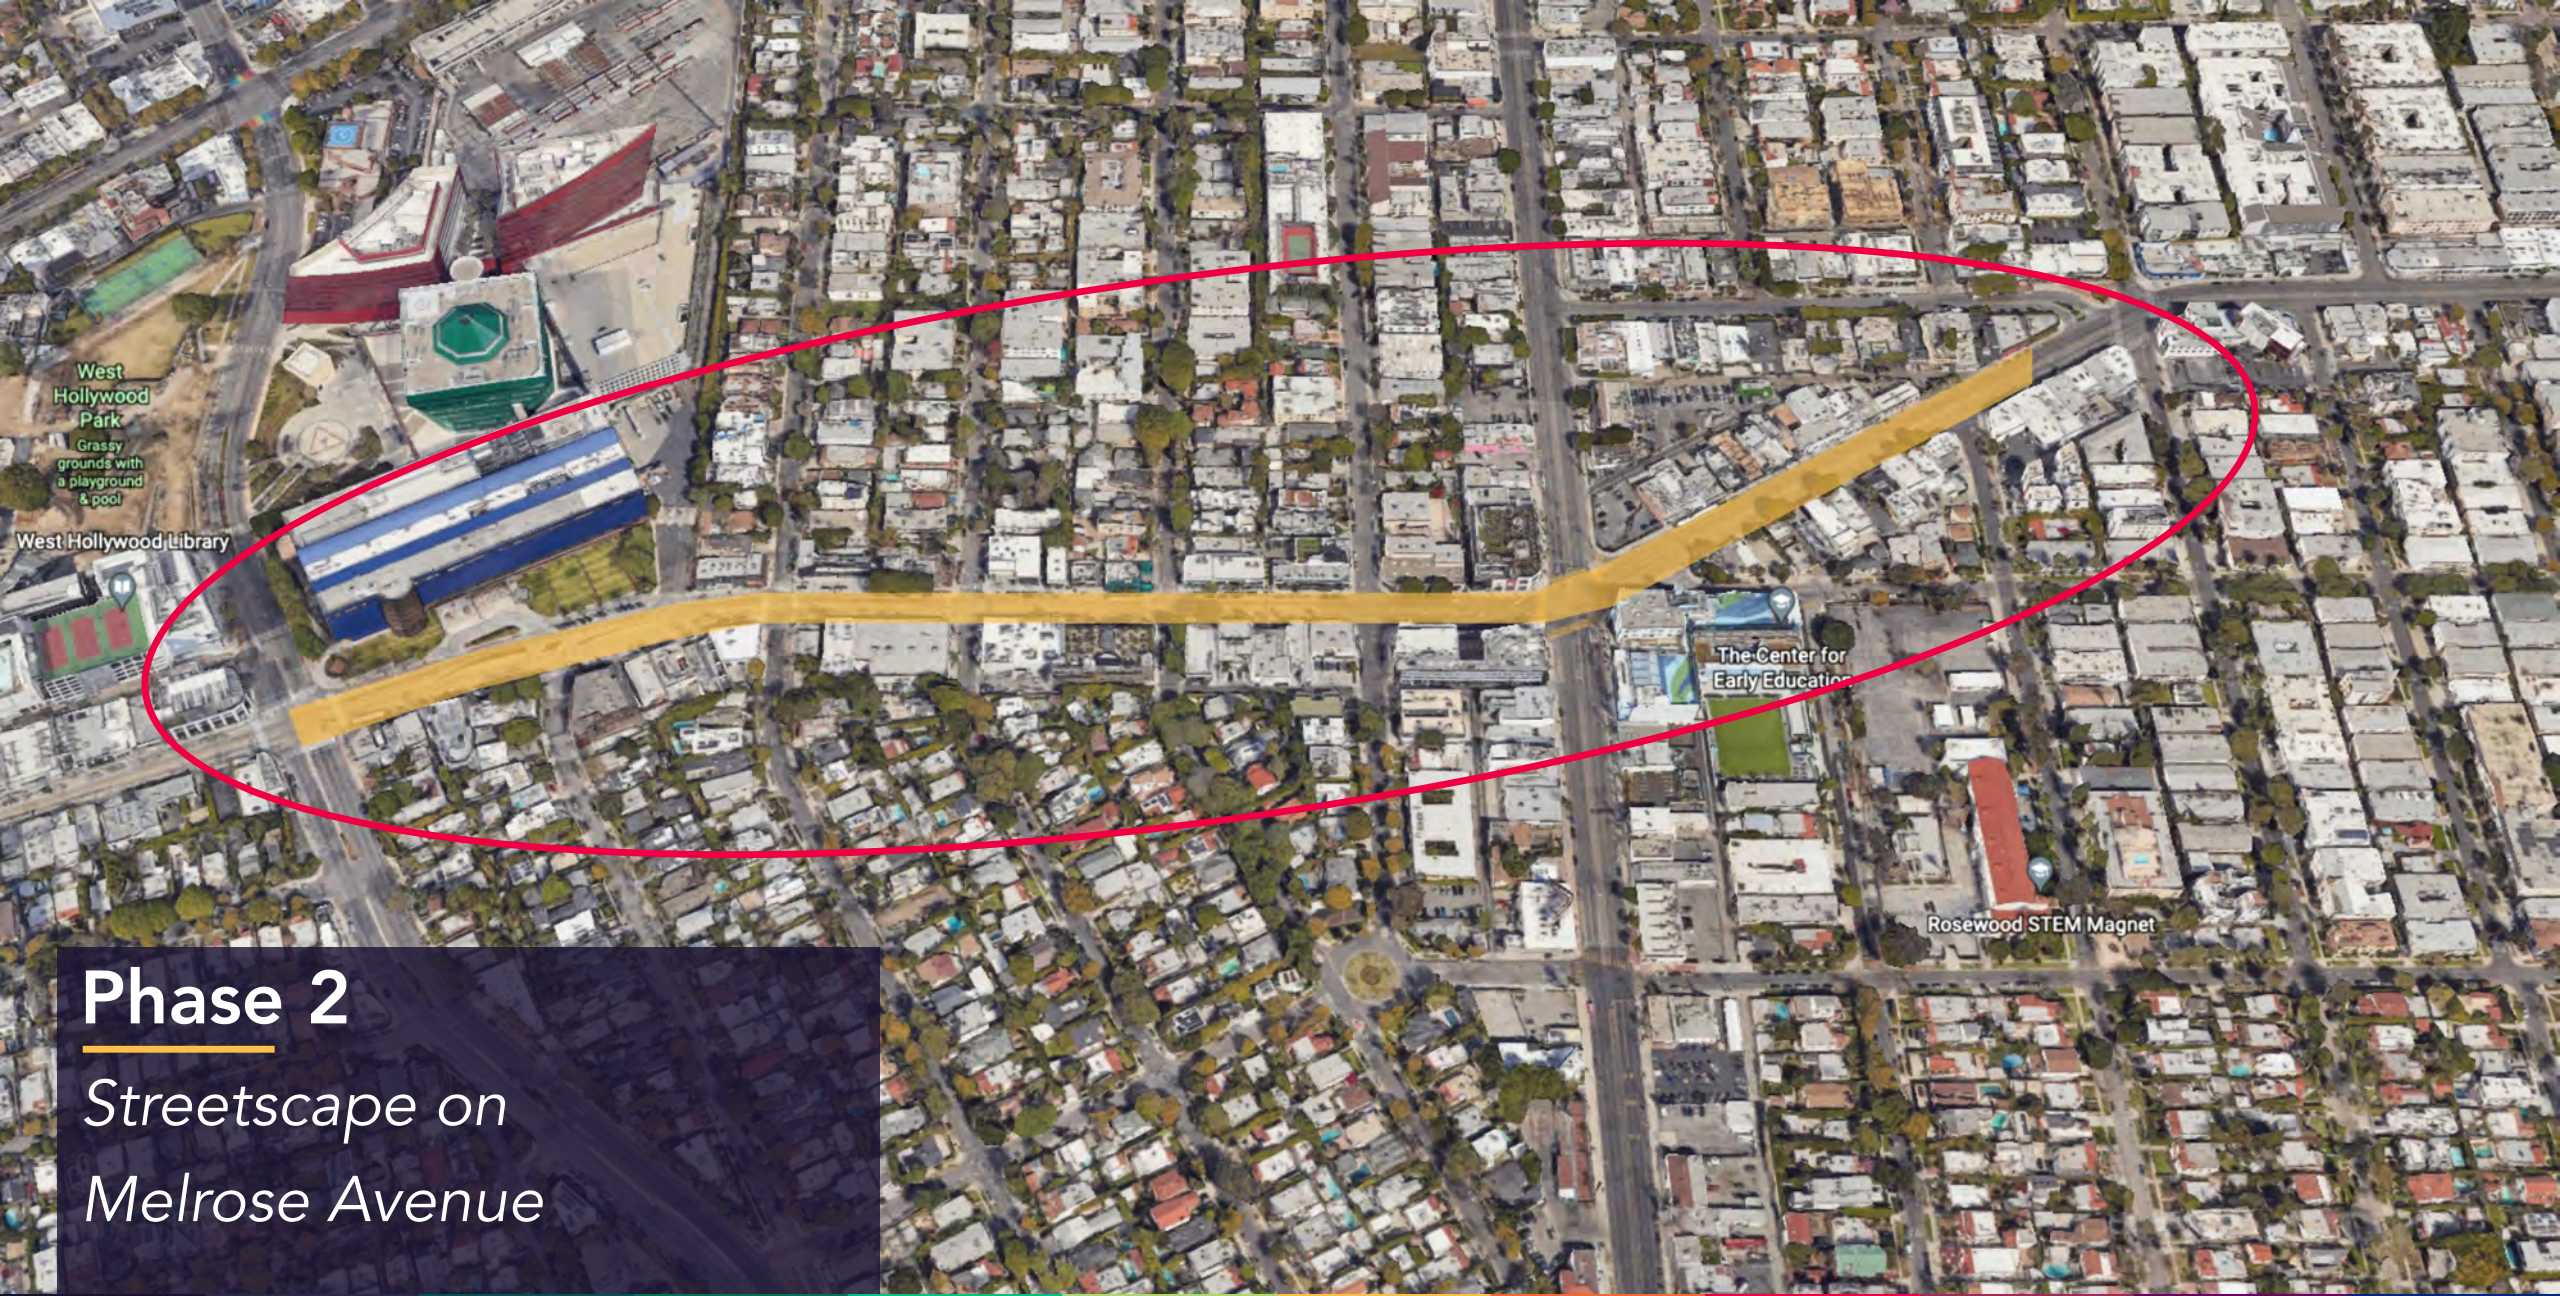

West
Hollywood
Park
Grassy
grounds with
a playground
& pool

West Hollywood Library

The Center for
Early Education

Rosewood STEM Magnet

Phase 2

Streetscape on Melrose Avenue






Schedule Overview

Construction Start: May 9, 2022

Contract Duration: 365 calendar days
(approx. 1 year)

Working Hours: 8AM – 5PM
Monday – Friday

Lane Closures: 9AM – 4PM

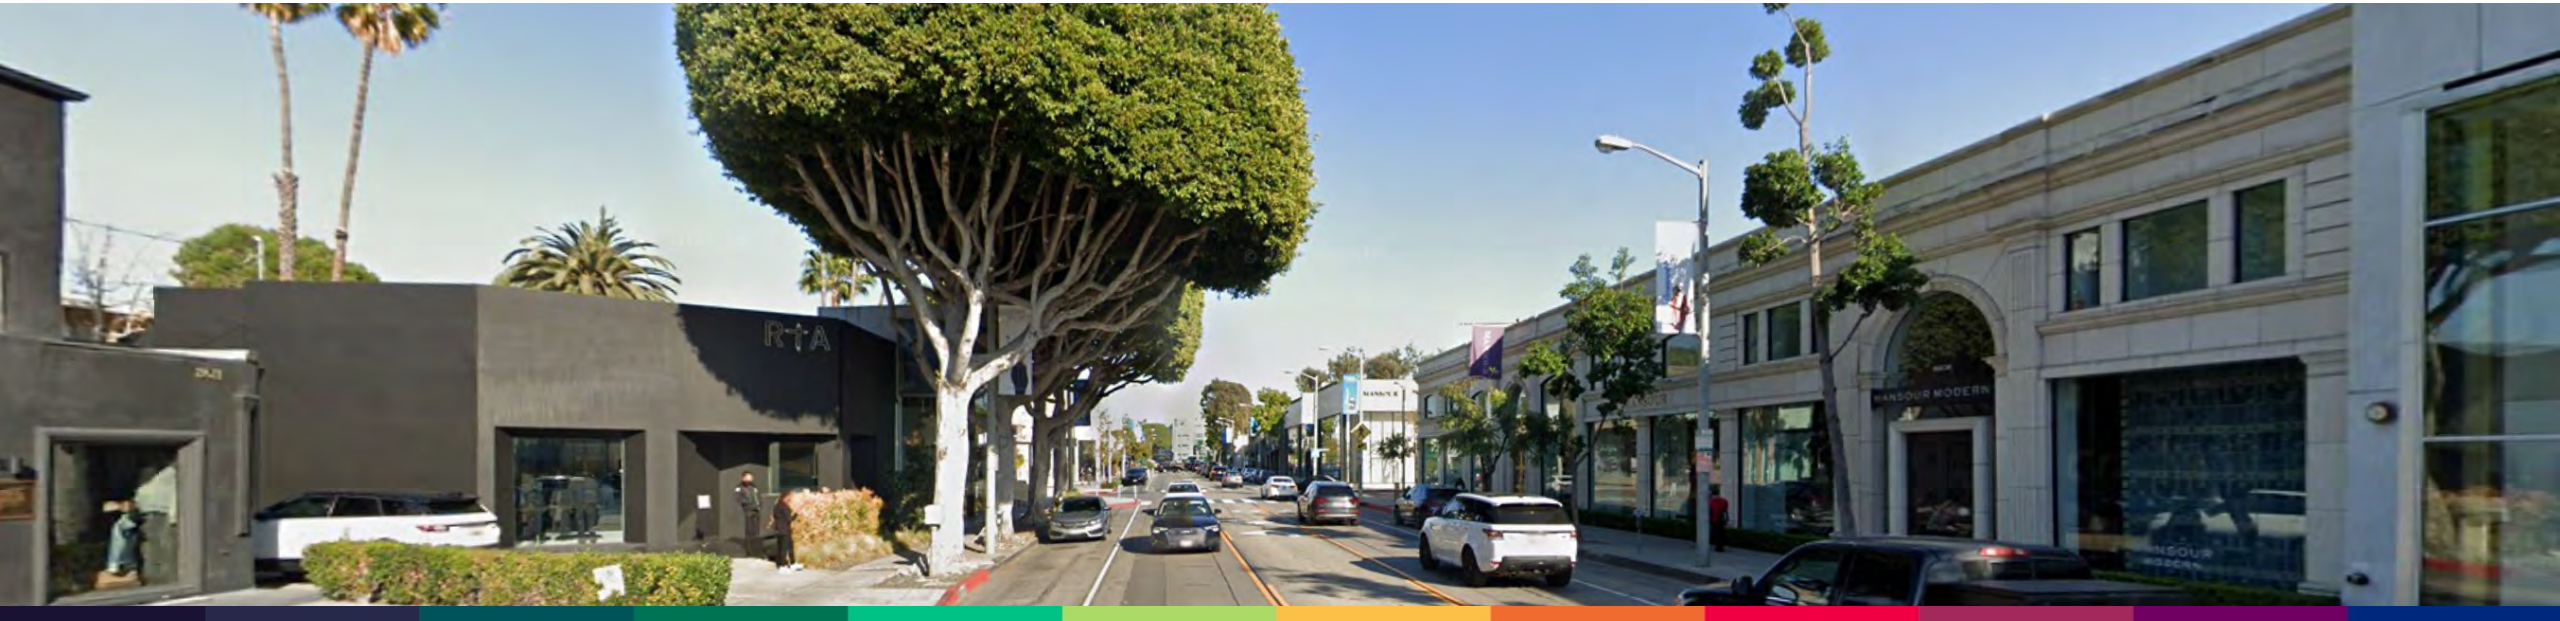

Streetscape Staged Schedule

Stage 1: May 2022 – Jul 2022

Stage 3: Jul 2022 – Late Oct 2022

Stage 2: Late Oct 2022 – Late Dec 2022

Stage 4: Jan 2023 – May 2023

Stage 5: May 2023 – Aug 2023





MELROSE AVE.
BUSINESSES
OPEN
DURING CONSTRUCTION

BIKE LANE

SPEED LIMIT
35





Next Steps

Stage 3: North side of Melrose Ave from Westbourne Dr. to La Cienega





Construction Activities:

Tree removal

Removal and replacement

- Concrete sidewalks (temporary asphalt walkway if necessary)
- Curb & gutter
- Driveways
- Asphalt roadway pavement

Striping (painting) of new traffic lanes, parking spaces, and road markings

Parking Validation Program




Melrose
Streetscape
Parking Map

Validated Public Parking for **WEST HOLLYWOOD PARKING GARAGE** 625 N. SAN VICENTE BOULEVARD

Melrose Ave Validation Program

- 1-hour additional parking with validation (2-hours free total)
- Valid at City Structure 625 N San Vicente Blvd. only
- Scan QR code below to request validations tickets

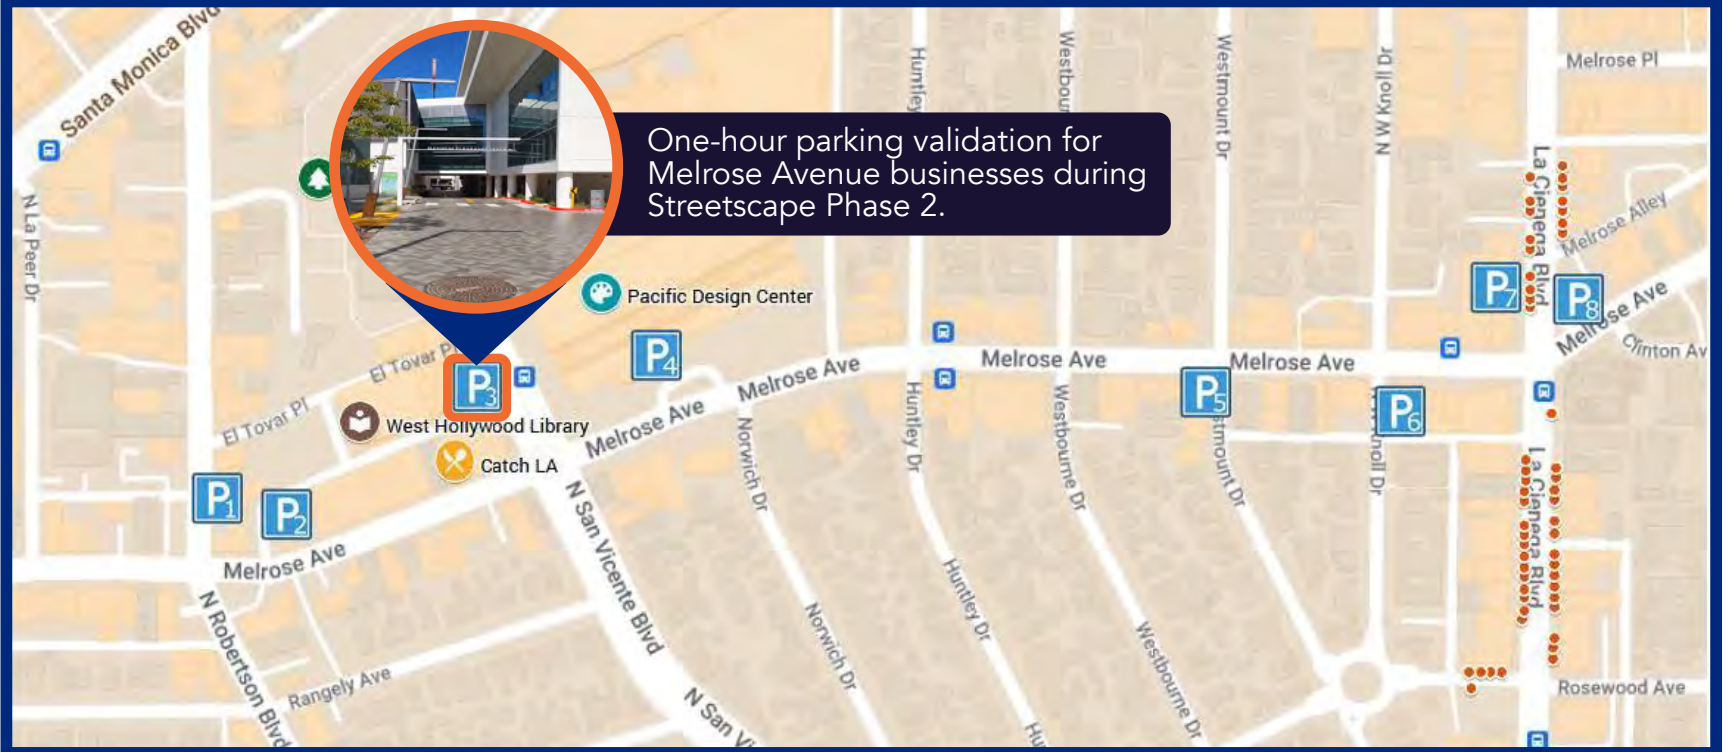



JOIN OUR MAILING LIST

Email Us

WeHoDesignDistrictStreetscape@
bergcm.com



GIVE US FEEDBACK

Project Feedback Line

1 (800) 362-3996



VISIT OUR WEBSITE

Project Website

WeHoDesignDistrictStreetscape.com



QUESTIONS